
# AIMOC WIM

02 - Modular static + WIM, side by side

CONFIDENTIAL - CONCEPT

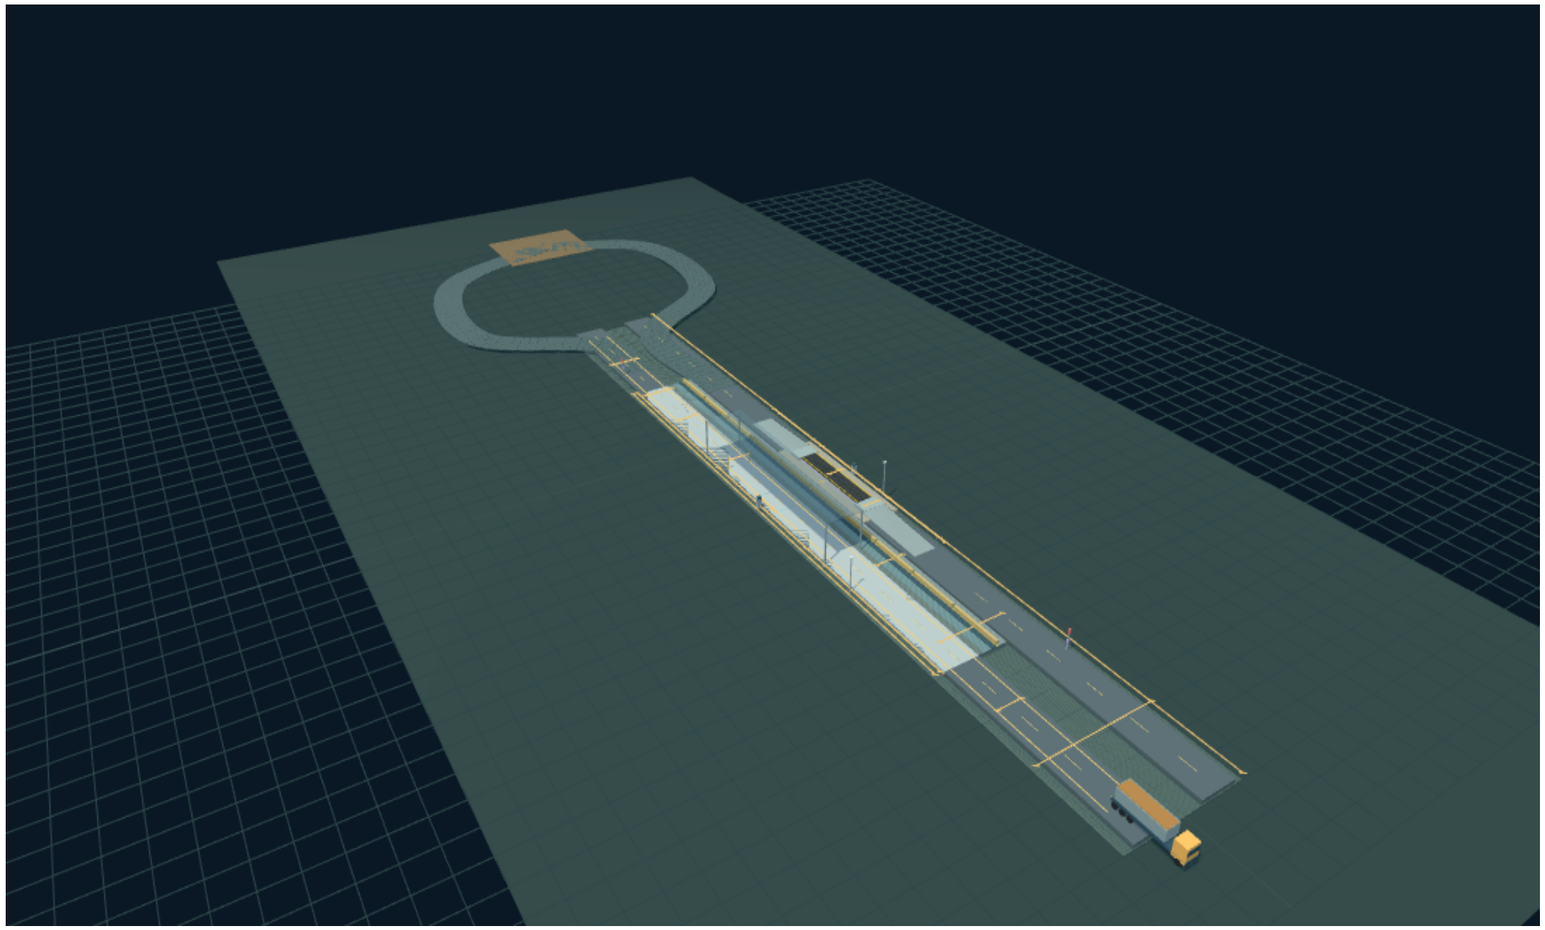

Modular static: 80 t x 20 kg; pitless modular

Platform 18 x 3 m; drawing overall width 3.20 m

6 modules: 1.50 x 6.00 x 0.308 m each

8 x Balanza LX8 30 t; Fine FS-8000

Static deck +1.608 m; rise 0.708 m*

Ramps 2 x 14.16 m @ 5%; footprint 52.32 m*

WIM 100 x 6.5 m; live lane 4.5 m

Working corridor 22 x 170 m; centres 12.5 m

*Levels, ramps, landings and raft are coordination assumptions; the PDF does not supply foundation drawings. 3.2 m is an overall dimension, not clear width.

A 3.2 m truck needs tyre/guard-rail clearance review; this simulation holds that profile. QR does not replace IR.

Source: customer-supplied technical PDF, pages 3-9. Quoted prices and personal contacts are not published.



PDF specifications are distinguished from civil assumptions. Not OEM construction drawings.

| Component | Specification | Source note |
|---|---|---|
| Type / capacity | Pitless modular movable · 80 t × 20 kg | PDF p. 8 |
| Nominal platform / drawing overall width | 18 × 3 m / 3.20 m | PDF p. 4, 8 · bukan lebar bersih / not clear width |
| Modules / arrangement | 6 × (1.50 × 6.00 × 0.308 m) · 2 across × 3 longitudinal | PDF p. 4, 8 |
| Structure / surface | L-Series steel · chequered steel deck | PDF p. 5 · 308 mm = module depth, not plate gauge |
| Guard rails / each | 12 × (75 × 2900 × 180 mm) | PDF p. 4, 8 |
| Finish | Sandblasting + 2-tone heavy-duty powder coating 300 um; black platform / yellow rails | PDF p. 3, 8 |
| Load cells / mounts | 8 × Balanza LX8 30 t analog + 8 mounts | PDF p. 7-8 · scale stays 80 t, not 240 t |
| Indicator | Fine FS-8000 · Korean · table/panel · 7-digit blue display · aluminium housing | PDF p. 7-8 |
| Indicator features | Auto span calibration; push-button/auto tare; peak/sample hold; M+/M-; claimed 10-year data backup | PDF p. 7 · modes/retention to verify |



PDF specifications are distinguished from civil assumptions. Not OEM construction drawings.

| Component | Specification | Source note |
|---|---|---|
| Junction / cabling / surge | 1 × 8-channel stainless junction box; 8 cable thyristor items; 25 m load-cell cable; 1 surge protection | PDF p. 7-8 · cable thyristor term requires clarification |
| Cell specifications | Combined error ±0.03% F.S.; zero balance ±1% F.S.; insulation 5000 Mohm; operating -20...+70°C | PDF p. 7 · cell specs, not whole-scale accuracy |
| Sensitivity / cell overload | PDF: 2.0 ±0.002%mV/V; safe load 150% F.S.; ultimate 200% F.S. | PDF p. 7 · sensitivity notation requires clarification; not operating permission |
| Cell protection | PDF lists IP67 (5 t), IP68 (10-15 t); 30 t rating NOT specified | PDF p. 7 · no IP68 claim for quoted 30 t cells |
| Cell material | Alloy steel / stainless steel listed; selected variant unconfirmed | PDF p. 7 · confirm coastal corrosion grade |
| Local software | CALISTA / Callista standard: single/double weighing, multilevel access, ticket customisation, Excel export, reports | PDF p. 7-8 · spelling differs; not a confirmed API |
| Calibration accessories | 5 × 20 kg test weights listed; not sufficient by themselves for full 80 t verification | PDF p. 8 · authority/OEM test-load plan needed |
| Fabrication / installation | 30 days after PO if unavailable; on-site installation 4 working days | PDF p. 9 · not total civil / commissioning duration |
| Warranty / metrology | Electronics 1 year; structure 3 years, conditional; type approval claimed, certificate not supplied | PDF p. 6, 9 · verify exact approval and site tera |




PDF specifications are distinguished from civil assumptions. Not OEM construction drawings.

# AIMOC WIM

Coordination plan and section

CONFIDENTIAL - CONCEPT


## PLAN · Static 18 × 3 m + WIM

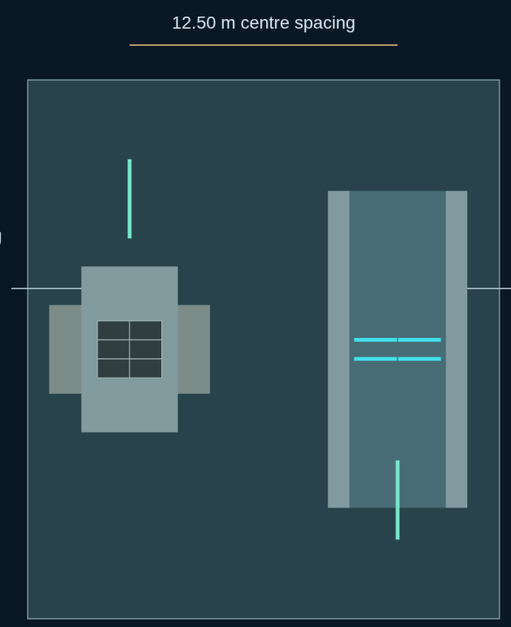


22 × 170 m concept corridor; loop excluded

*Ramps, landings, raft and elevations: coordination assumptions; OEM foundation unavailable.

## SECTION · STEEL MODULES AND SUPPORTS

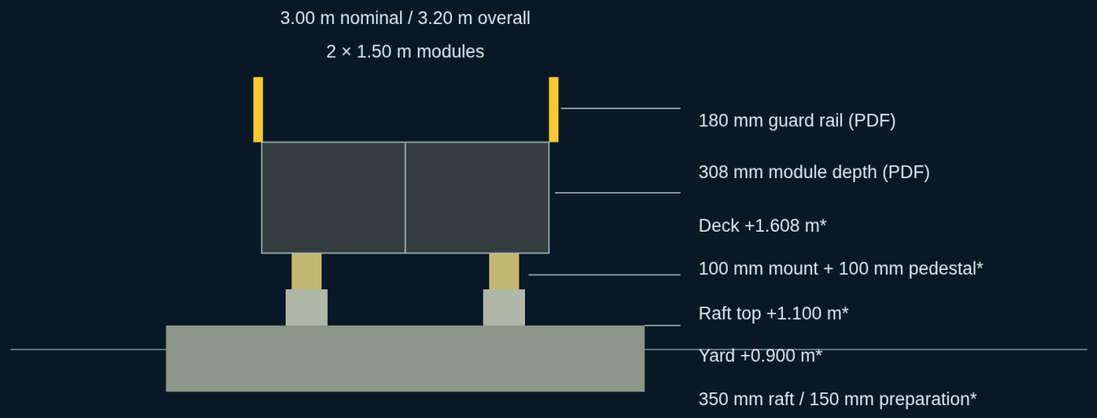


*Civil assumptions for reclaimed ground, not Static foundation details. Vertical scale exaggerated.

308 mm is total module depth, not steel plate thickness. 3D mount sizes/positions are illustrative.

Civil assumptions: 28 x 7.5 x 0.35 m raft; 100 mm pedestal; 100 mm mount; 308 mm module. OEM reinforcement, concrete grade, anchors and bearing design are not supplied. Verify settlement, flooding, drainage, corrosion and WIM interaction before construction.

| Element | Size / position | Status |
|---|---|---|
| Static instrument | Modular static · 80 t × 20 kg · pitless modular | PDF data; division is not accuracy |
| Platform / overall width | 18 × 3 m / 3.20 m | Nominal differs from drawing overall width; not clear width |
| Modules | 6 × 1.50 × 6.00 × 0.308 m | 2 across × 3 longitudinal; module depth is not plate gauge |
| Corridor / centres | 22 × 170 m / 12.50 m | Coordination; excludes loop/holding/setbacks |
| Static raft / separation | 28 × 7.50 × 0.35 m / 5.50 m | ASSUMPTION, not OEM drawing; soil interaction unverified |
| Concept levels | Yard +0.900; raft +1.100; pedestal 0.100; mount 0.100; deck +1.608 m | Except 308 mm module, levels/supports are coordination assumptions |
| Concept ramps / landings | 2 × 14.16 m @ 5%; 2 × 3 m; footprint 52.32 m | 0.708 m rise; 4.5 m approach ramps to 3 m deck; taper needs OEM design |
| Rails / cells | 12 × 75 × 2900 × 180 mm; 8 × 30 t | 80 t system capacity; 8 × 30 t does not mean 240 t scale capacity |
| WIM / layers | 100 × 6.50 m; 4.50 m lane; 1 m shoulders; 450/300/150 mm | Concrete/base/subbase concept; structural design required |
| Quartz / positions | 4 × 2 m; 50 mm gap; 6 m row spacing; lane edge 225 mm | 2 rows; epoxy resin in OEM sensor slots |
| WIM canopy | 40 × 8 m; 7 m clear; gantry 6.5 m | Supports independent of weighing structure |
| QR / detectors | Entry Z=-56; exit Z=+60; IR Z=+14 | 1 outbound IR set; 2 CCTV and 2 QR |

## OEM / civil

PDF does not provide foundation/ramp drawings, reinforcement, concrete grade, bearing or anchor details. Foundation drawing is supplied after PO.

## Reclaimed soil / flooding

The simulated 28 × 7.5 × 0.35 m raft, levels and ramps are coordination assumptions. Check CPT/SPT, settlement, WIM interaction, drainage/flooding and excavation limits.

## Truck / clearance

The 3 m nominal platform differs from the 3.2 m overall drawing width. A 3.2 m truck is on engineering hold until tyre positions, guard-rail clearance and swept envelope are approved.

## Interface / AIMOC

FS-8000 ports/protocol, units, gross/tare/net modes, stable flag, checksum and software licensing are not supplied. IoT gateway is additional integration scope; Excel export is not a real-time API.

## Metrology / FAT-SAT

Verify type approval for the installed variant, site verification and eccentricity/stability/repeatability tests and test loads. A 20 kg division is not a ±20 kg accuracy guarantee.

## Environment / scope

Confirm 30 t cell IP/material, salt/flood protection and coating repair. PDF excludes foundation, ramps and weigh house; customer supplies power, cables and lifting equipment. Computer/verification scope needs clarification because the list and terms differ.

PDF schedule: 30-day fabrication if unavailable + 4 working days equipment installation; excludes civil/curing/integration/verification. Confirm PDF date/revision, 30 t cell IP, sensitivity, computer/verification scope and type-approval certificate.